





## STOCK FENCE

## C6/90/30

- C = MEDIUM GRADE**
- 6 = NUMBER OF LINE WIRES**
- 90 = HEIGHT IN CM**
- 30 = DISTANCE BETWEEN VERTICALS IN CM**

- A taller stock fence used in areas of low pressure and where there is need for a taller option.
- It has less line wires and stay wires than the standard C8/80/15 which makes it a more cost-effective option.
- Manufactured to BS EN 10223-5
- Galvanised to BS EN 10244-2 class A
- Tension curve to help protect the fence.
- Hinge Joint.

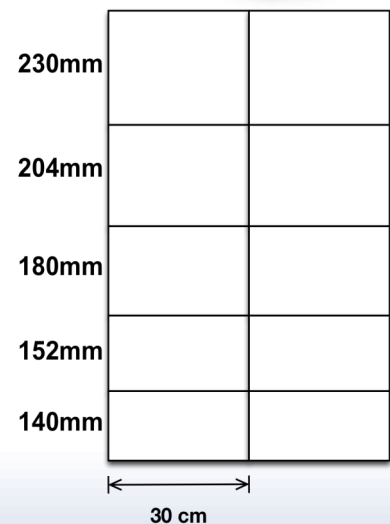

Top and bottom line wires	3.00mm-695-850 N/mm <sup>2</sup>
Intermediate line wires	2.50mm-695-850 N/mm <sup>2</sup>
Vertical wires	2.50mm-415-550 N/mm <sup>2</sup>
Roll lengths available	50m, 100m
Weight of 50m roll	20.5Kg